




F2125

FiberTwist-Series
Installation Guide


## **Button** overview

# Unlock button Remove FiberTwist or Blind Cover – press and hold while twisting counterclockwise LED dim button Dim LEDs – press and release to dim LEDs in steps

## Port overview



# LED overview

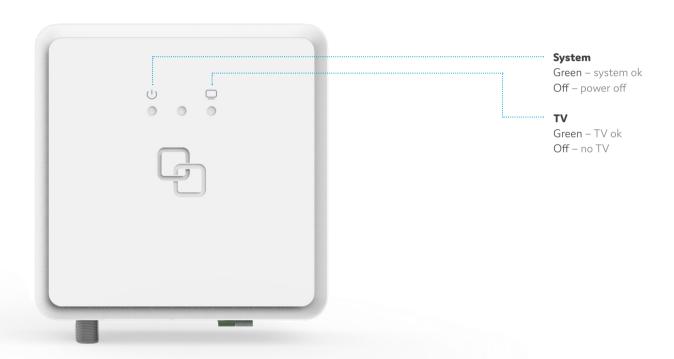

## Installation guide

Different language versions of this document and additional product information are available on https://genexis.eu/product/fibertwist/downloads#optical-data

#### **Box contents**

- · Genexis FiberTwist (active device)
- · Power adapter
- · 2x Spare device label (self-adhesive)
- · Installation Guide (this document)

#### **Label position**

The product label is positioned on the back of the active device.


### **Preparation**

Ensure there is a power socket within reach of where the device is being installed.

**Important:** Instructions need to be followed precisely and uninterrupted. This minimizes the risk of damage to the fiber optic connectors, causing a severe degradation of signal quality.

#### Remove Blind Cover (if present)

- 1. Press and hold the unlock button (see button overview).
- 2. Rotate the Blind Cover counterclockwise till it blocks.
- 3. Remove the Blind Cover from the baseplate (FTU) by pulling it towards yourself.
- 4. Store the Blind Cover in a safe place.

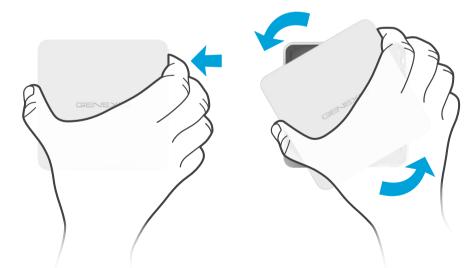

## Remove dust cap

- 1. Take the FiberTwist out of the box.
- 2. The dust cap is connected to the red string located on the rear of the FiberTwist.
- 3. Remove the dust cap by pulling the red string.



#### Twist!

- 1. Place the FiberTwist on the FTU as shown in the picture below, in a 30-degree angle.
- 2. Rotate clockwise until it clicks into place.
- 3. Make sure the FiberTwist is aligned squarely on the FTU, each edge must line up directly with the FTU below.

Your FiberTwist is now installed!





#### Connecting the FiberTwist

- 1. If required, connect your television / set-top box to the TV port with a coax cable.
- 2. Remove the green dustcap from the LC/APC coupler and connect your fiber gateway using a fiber patch cable with a green LC/APC connector.
- 3. Connect the supplied power adapter to the FiberTwist and plug the adapter into a power socket.

If at some point in the future it becomes necessary to uninstall the FiberTwist, please place the Blind Cover back on the FTU immediately and put the dust cap back on the FiberTwist.

## **EU Declaration of Conformity**

Hereby, Genexis Netherlands B.V. declares that the product FiberTwist-F2125 is in compliance with Directives 2014/30/EU, 2014/35/EU, 2011/65/EU, Delegated Directive 2015/863 and Ecodesign Directive 2009/125/EC.

The full texts of the EU declaration of conformity are available at the following internet address: https://genexis.eu/product/fibertwist/red/fibertwist-f2125

**Company Name** 

Genexis Netherlands B.V.

**Company Address** 

Lodewijkstraat 1a 5652 AC Eindhoven The Netherlands

Name and title of authorized person

Maarten Egmond, CTO

Signature of authorized person

Place of issue

Eindhoven
The Netherlands

Date of issue

2021-05-04

