




## Genexis FiberTwist

### P6000-Series Point-to-Point (PtP)

The all-in-one fiber gateway

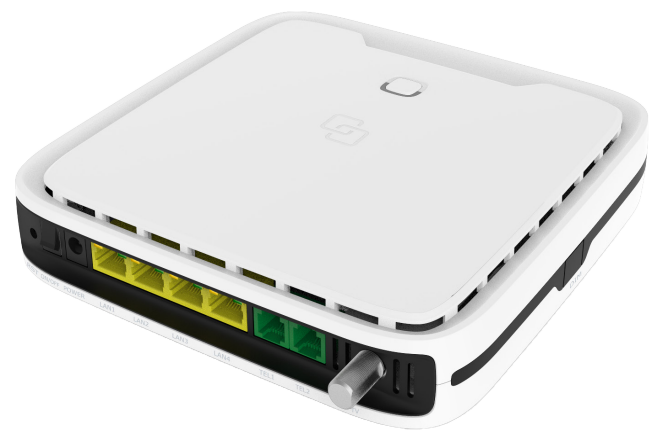

No hassle and completely connected, that is what the new FiberTwist P6000-Series gives you. It is a complete all-in-one fiber gateway to provide homes with an optimal WiFi connectivity using the latest WiFi 6 standards.

No more inconvenience with cables or connecting different devices to set up a WiFi connection in the home: all is done from 1 device.

#### Key features

- All-in-one fiber gateway
- Both Point-to-Point as GPON (see G6000 GPON datasheet)
- Compatible with all FiberTwist FTUs
- Easy installation and set-up
- True Do-It-Yourself mechanism
- 802.11ax (WiFi 6)
- Wi-Fi EasyMesh™
- 5GHz (4x4) and 2.4GHz (2x2) radio design
- 2 FXS ports
- 4 LAN ports
- CATV (optional)
- CloudSight compatible

Its true Do-It-Yourself mechanism allows the end-users to install the FiberTwist themselves, all via a simple twist. Hence, no installers are needed!

The FiberTwist P6000-Series is designed for both Point-to-Point networks as well as GPON networks (see G6000-Series GPON datasheet) and is compatible with all FiberTwist FTUs.

#### One device for a complete fiber experience

The FiberTwist product line now includes an all-in-one active unit. This means it is not necessary anymore to add an extra device (e.g., Residential Gateway) or include a cable infrastructure in homes where space is limited.

Point-to-Point, GPON, voice and/or CATV? The FiberTwist 6000-Series covers all possible scenarios, it is up to you to select the desired model.

All possible models come with the latest WiFi 6 technologies, providing the end-user with quality WiFi at all time. In other words, end-users can now get the full fiber experience from one single device.

If there is a need to extend the WiFi coverage in the home, the FiberTwist P6000-Series can be extended with an additional extender supporting the Wi-Fi EasyMesh™ standard (e.g., see Pulse EX600 datasheet).



# Product features and specifications

## Genexis FiberTwist P6000-Series (PtP)

### General specifications

Dimensions (H x W x D)	180x180x57 mm
Power supply voltage	12 Vdc ± 5% 2A
Operating temperature	0 - 40 °C
Storage temperature	-25 - 70 °C
Relative humidity	10% - 95%

### Fiber (WAN) interface

Optics compliant with 1000BASE-BX20-U	
Tx wavelength	1310 nm
Rx wavelength	1490 nm
Optical input range	-23 ... -3 dBm
SC/APC connector	

### LAN interface

4x 10/100/1000 Base-T Ethernet RJ45 ports  
LED indicators for speed and activity  
IEEE802.3az Energy Efficient Ethernet (EEE)

### WLAN interface

2x2 MU-MIMO 802.11ax 2.4 GHz WiFi  
4x4 MU-MIMO 802.11ax 5 GHz WiFi

### Voice interface

2x FXS RJ11 ports

### USB interface

1x USB 2.0 port

### User interfaces

Power connector  
Power switch  
Reset button  
WPS button  
RGB device status LED  
End-user web based GUI

### USB features

NTFS and FAT32 file system storage devices

### Wireless features

WiFi MultiMedia (WMM)  
WiFi Protected Setup (WPS)  
WiFi Security (WPA2 and WPA3)  
Wi-Fi EasyMesh™ R2  
DFS and Radar Detection  
Multiple SSID and hidden SSID  
Guest network SSID

### Gateway features

NAT/PAT, DHCP, DNS  
NTP, RTSP  
Stateful Packet Inspection Firewall (SPIF)  
DMZ, uPnP, Port forwarding

### Ethernet features

IPv4 and IPv6 dual IP stack  
VLAN (un)tagging, Q-in-Q, QoS  
PPPoE, L2TP, IGMPv3

### Voice features

SIP based Voice-over-IP  
G.711 A-law /  $\mu$ -law codec  
G.729 codec  
5 REN support  
Line Echo Cancellation  
DTMF: In-band, RFC2833, SIP-Info  
Class 5 features

### Management and control

SNMP  
TR-069, TR369  
TR-181, TR-104 data models  
Command Line Interface (CLI)  
WebGUI  
Mobile App  
CloudSight  
Fail-safe firmware upgrade

### CATV interface\*

Wavelength (typical)	1550 nm
Optical return loss	min 45 dB
RF passband	45-900 MHz
RF output impedance	75 $\Omega$
F-Connector length	11 mm
AGC optical input power	-9 ... 0 dBm
RF output level (AGC on) according to CENELEC-42	80 ± 2.5 dB $\mu$ V 4% OMI / ch
RF flatness	max 2 dB
Output return loss	max -10 dB
Slope / tilt	1 ... 4 dB
CNR min	47 dB@-8 dBm
CSO / CTB	max -57 dBc
Spurious to carrier	max -57 dBc
MER QAM-64	> 34
MER QAM-256	> 36
Remote enabling of CATV	

### Regulatory compliance

Radio Equipment Directive 2014/53/EU  
Energy Related Products Directive 2009/125/EC  
CE Safety Directive 2014/35/EU  
RoHS and REACH Directive 2011/65/EU  
ITU-T K.21 standard compliancy

\* Applicable to selected models only

## Genexis FiberTwist P6000-Series product models

Model	AON WAN (Mbps)	LAN	WLAN 2x2 2.4 GHz	WLAN 4x4 5.0 GHz	FXS	USB	Wavelength		
							Tx	Rx	CATV
FiberTwist P6414	1000	4x	11ax	11ax	2x	1x	1310 nm	1490 nm	-
FiberTwist P6416	1000	4x	11ax	11ax	2x	1x	1310 nm	1490 & 1550 nm	-
FiberTwist P6426	1000	4x	11ax	11ax	2x	1x	1310 nm	1490 nm	Yes

Note:

- FiberTwist P6416 is available upon request, please contact your sales representative

- Not every listed feature may be included in the shipping product. We reserve the right to make changes of technical specifications, housing or design without prior notice.